

TENDER SCHEDULE

Name of the work:-Renovation of Sri Jaganath Temple at kalimela village,Block- Kalimela for the year 2023-24					
Cost of Tender Paper : Rs.6000/-			Class of Contractor C / D		
Amount put to Tender (Approx.) : 2100840			At : Kalimela		
Cost of Tender Paper : Rs.6000/-			Dist. : Malkangiri		
Earnest Money 1% : Rs			Time for completion of the work : 6 (Six) Months		
Sl. No	Item of Work	Quantity	Unit	Rate	Amount
1	Supplying all labour, T&P etc. and earth work in excavation of foundations in hard soil including dressing and levelling of the bed and depositing the soil within 50M intial lead & 1.50M initial lift and including transportation of all materials to work site, payment of royalty, taxes etc. all complete as per specification and direction of Engineer-in-charge.				
	GF	95.20	Cum	₹ 206.77	₹ 19,685.00
2	Supplying all materials, labour, T&P etc. and filling in foundatin and plinths with sand well watered and rammed including transportation of all materials to work site, payment of royalty, taxes etc. all complete as per specification and direction of Engineer-in-charge.				
	GF	80.07	cum	₹ 436.31	₹ 34,935.00
3	Supplying all materials, labour, T&P etc. and providing Cement concrete (1:4:8)in foundation and up to lowest bed level using hard black hand broken granite metal of size 4cm of approved quality from approved quarry as per approved design including hoisting laying, compacting concrete in layers not exceeding 6" thick watering curing finished smooth providing grooves or beads where necessary including cost, conveyance royalties and taxes of all materials with labour and T&P required for the work complete in all respects including dewatering if required i all complete as per specification and direction of Engineer-in-charge.				
	GF	60.64	cum	₹ 4,538.41	₹ 2,75,209.00
4	R.C.C. work of M-25 grade using 20mm & down graded bhcbg chips including cost conveyance etc. complete				
a)	Column Base				
	GF	12.43	cum	₹ 6,457.08	₹ 80,262.00
a)	Column				
	GF	11.04	cum	₹ 16,154.90	₹ 1,78,350.00
b)	Plinth Band				
	GF	8.74	cum	₹ 7,276.20	₹ 63,594.00
c)	Beams & Columns .				
	GF	20.58	cum	₹ 16,154.90	₹ 3,32,468.00
d)	Roof Slab				
	GF	26.50	cum	₹ 12,753.00	₹ 3,37,955.00
5	2.5cm thick A.S. flooring with C.C.(1:2:4) with punning using 12mm size chips				
	GF	215.31	cum	₹ 336.35	₹ 72,419.00
6	Supplying all materials, labour, T&P etc. and cutting, straightening, coiled or bent up uncoated HYSD bars bending, binding, welding, and jointing if necessary and tying the grills and placing in proper position as required for RCC works including cost, conveyance, taxes of HYSD bars and binding wires of 18 to 20 gauge required for the work (Payment will made on weight of HYSD bars only and no separate payment will be made towards the weight of binding wires) as directed by EIC				
	GF	76.64	Qtl.	₹ 9,211.41	₹ 7,05,963.00

Note:- GST applicable on works contract shall be paid over the bill amount at the time of Payment of bill on submission on tax invoice

Tender schedule for the project "Renovation of Sri Jaganath Temple at kalimela village" for Rs. 2100840/- Rupees(Twenty One lakhs Eight Hundred Fourty only)

No of corrections :-
No of over writings :-
No. of Interpolation :-

C. M. S.
66/07/23
P. In Addl. P.D. (Tech.)
Executive Engineer, RWS&S-cum
D.R.D.A., Malkangiri
Addl. Project Director (Tech)
Zilla Parishad, Malkangiri

My quoted rate is % Excess % Less of Schedule rate.

(Both in figure and words) over the above amount put to tender.


Note:

Signature of Contractor

1. The contractor should not write any thing excepting quoting of percentage and in any case any thing else regarding tender rate is mentioned, the tenderer is liable for rejection.
2. Strike out which are not applicable.
3. Percentage quoted by the contractor shall be accurately filled in figures and words, so that there is no discrepancy.
4. If any discrepancy is found in the percentage quoted in words and figures then the percentage quoted by the contractors in words shall be taken as correct.
5. The percentage quoted in the tender with out mentioning excess or less will be treated as excess.
6. The contractor should write percentage excess or less up to one decimal point only. If he writes the percentage excess or less up to two or more decimal points the first decimal point shall only be considered with out rounding off.

MODEL ESTIMATE OF KALYAN MAUDAP
 CUM - COMMUNITY Centre.

15

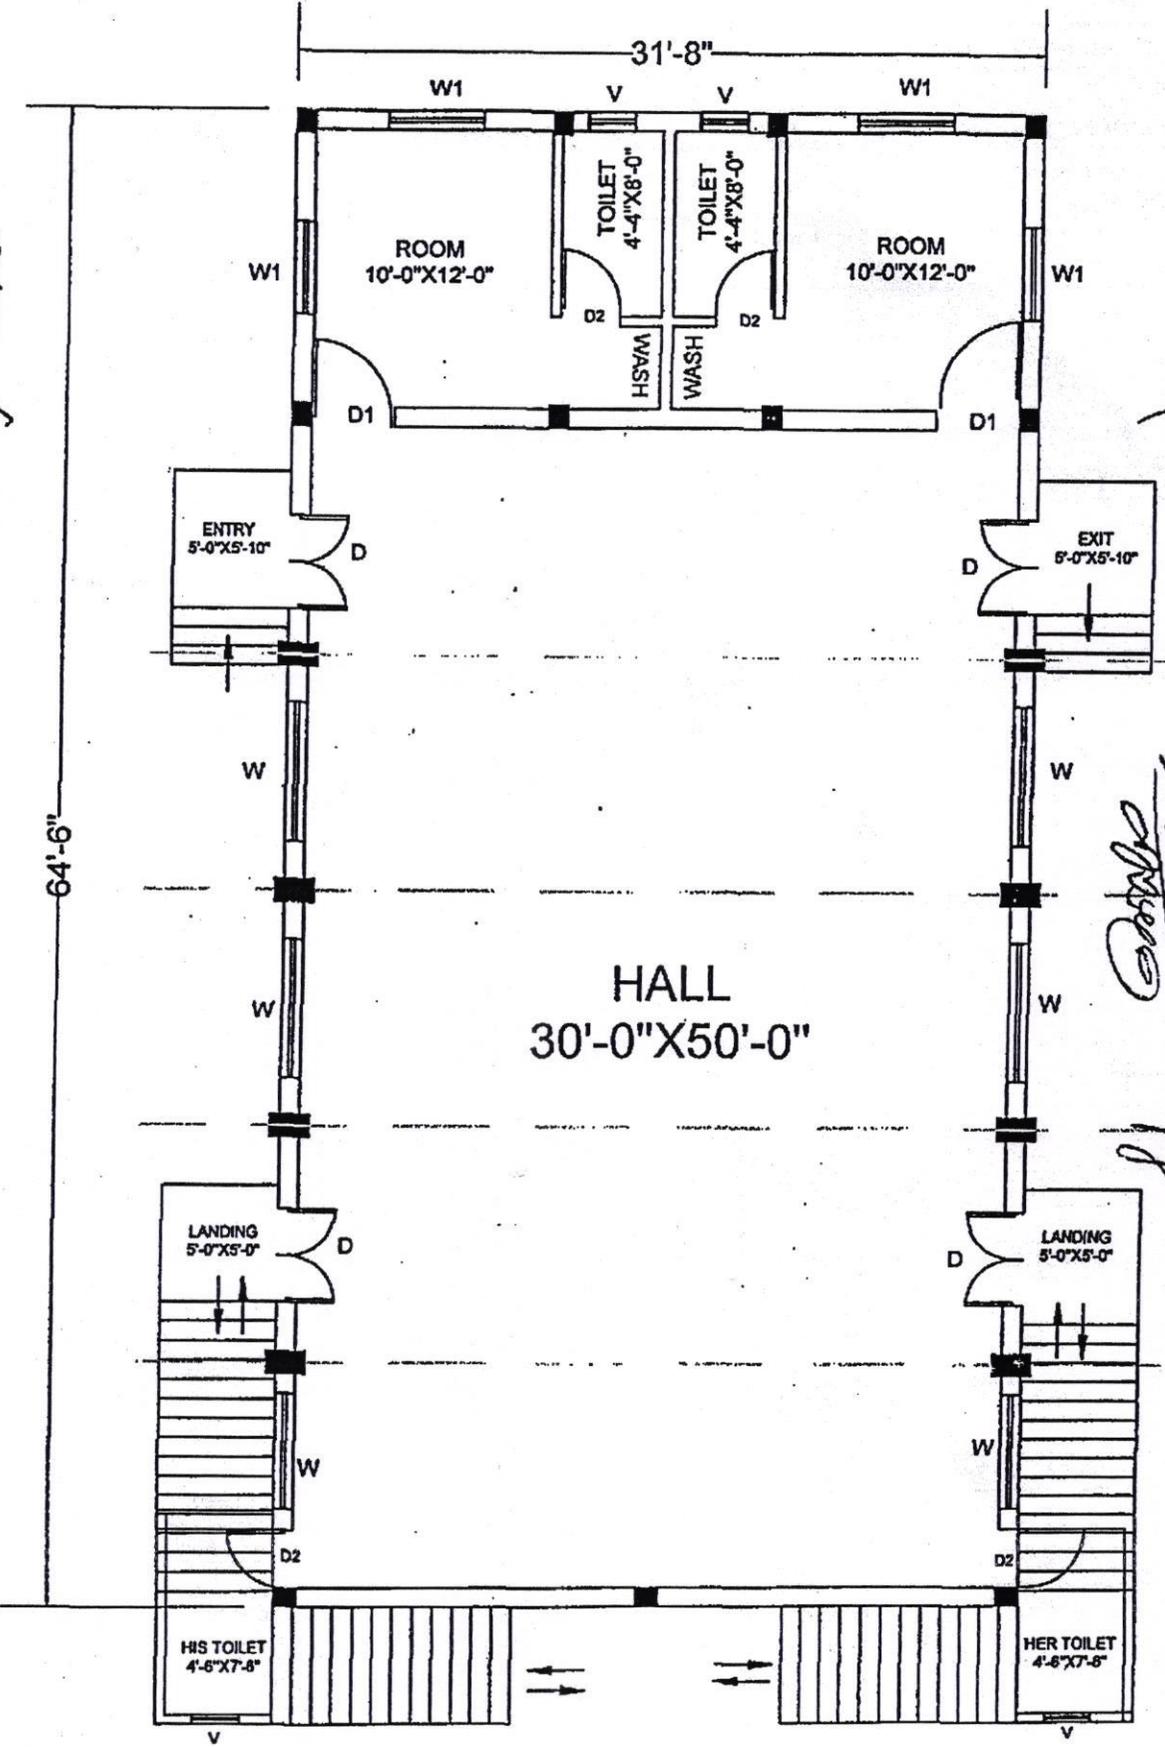

5/11/61
 Panchayati Raj Department
 Govt. of Odisha

[Signature]
 23.05.15
 Assistant Engineer
 Tech. Cell, P.R. Deptt.
 Bhubaneswar

[Signature]
 23.09.15
 Junior Engineer
 Estimator (Tech.)
 P.R. Deptt., Bhubaneswar

- GENERAL NOTES:
1. Written dimensions in the drawing must be followed.
 2. All measurements must be checked before execution.
 3. Proper design should be made for foundation, sub structure & super structure of double storied.

TITLE:- GROUND FLOOR PLAN	SCALE: 1:1	DATE:	DWG. NO.:- PR/01/15	PANCHAYATI RAJ DEPARTMENT GOVT. OF ODISHA, BHUBANESWAR.
------------------------------	---------------	-------	------------------------	--